


Payment Reminder Installation

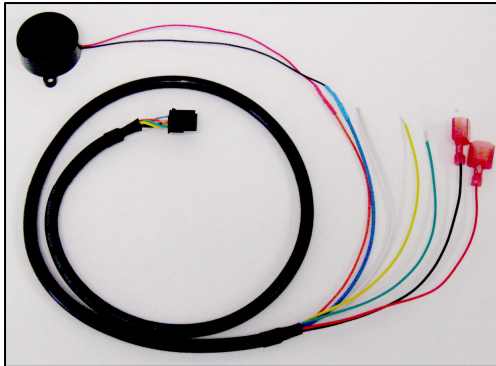

This feature allows a dealer to send an alarm to the S3000i unit that sounds when a customer starts the ignition. The alarm will sound 3 times every time the ignition is turned on. If Starter Disable is also “Enabled”, the ignition will not start and the customer will only get an alarm when attempting to start the vehicle.

Installing Payment Reminder

1. Connect the RED wire on the provided wiring harness to a constant +12VDC source
2. Connect the BLACK wire to GROUND
3. Connect the YELLOW wire to the ignition line. NOTE: The ignition wire must be connected for this feature to work.
4. Find a location under the dashboard to mount the alert device. You can use either double sided foam tape, or you can mount the device using the two mounting points on the speaker.
5. Mount the tracking device under the dash board. Be sure to place the device in a location where the top of the device is not blocked by any metallic objects.

Using Payment Reminder

Activating Payment Reminder

Customer service can activate the ability to use this feature if the “Payment Off” button isn’t showing up.

Enabling Payment Reminder

Enable the Payment Reminder by clicking on the “Payment-Off” and then click “Enable”. After the device is located, you will be returned to the mapping page and the “Payment-Off” now will read “Payment-On”.

Disabling Payment Reminder

To disable Payment Reminder, login to your account and select the appropriate vehicle. When the user interface appears, click the “Payment-On” button and then click “Disable” to disable the payment reminder.